



Downlight

**blazmoo**

90 x 75 / 100 x 80 / 125 x 96 / 150 x 112 / 200 x 135 mm



75 x 83 mm


# Downlight



Recessed



Voltage	220 - 240V
Frequency	50 - 60Hz
Power consumption	6 - 45W
Luminous flux	Up to 4500Lm
Efficacy	Up to 110Lm/W
Color rendering index	>80
Color temperature	3500K / 4000K
Ta	+10 ... +40 °C
Difuser	Clear
Control	DALI / Non dimmable / 1-10V
Mounting	Recessed
Body material	Die casting Aluminium heat sink
Color	RAL 9003
Size (cut out x height mm)	75 x 83 / 90 x 75 / 100 x 80 / 125 x 96 / 150 x 112 / 200 x 135
Lifetime	50 000 h (L85B10) at Ta = 25 °C 70 000 h (L80B10) at Ta = 25 °C
Warranty	5 years

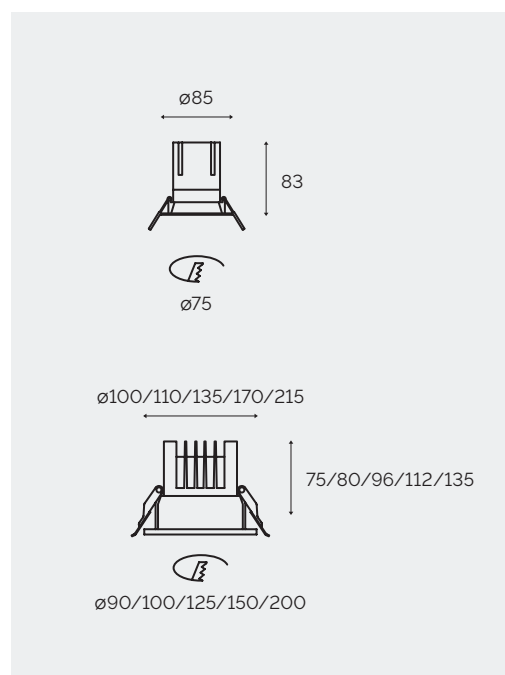

## Power/Size table

Power	Size	Cut out
6 - 12 W	85 mm	75 mm
9 - 12 W	100 mm	90 mm
15 - 20 W	110 mm	100 mm
15 - 20 W	135 mm	125 mm
20 - 45 W	170 mm	150 mm
30 - 45 W	215 mm	200 mm

## Accessories



Assembly plate

Article 99020013

## Connection cables




2x1.5mm<sup>2</sup> (x2.5m) with Wago Winsta (770-112/041-000) 2-way plug

Article 99020006




Connection cable with DALI 5x1.5mm<sup>2</sup> (x2.5m) with Wago Winsta(770-1115) 5-way plug

Article 99020007

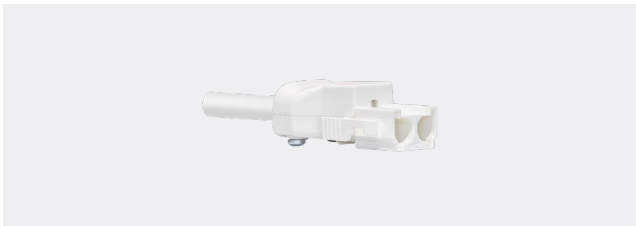


Connection cable 2x1.5mm<sup>2</sup> (x2.5m) with Ensto (NAC21S.W) 2-way plug

Article 99020008

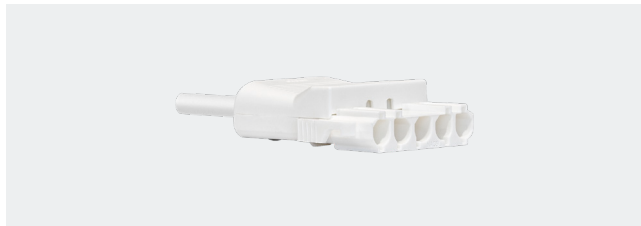


Connection cable 5x1.5mm<sup>2</sup> (x2.5m) with Ensto (NAC51S.W) 5-way plug

Article 99020009

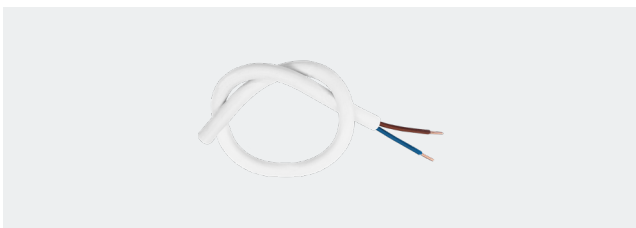

Connection cable 2x1.5mm<sup>2</sup> (x2.5m) with open end

Article 99020011

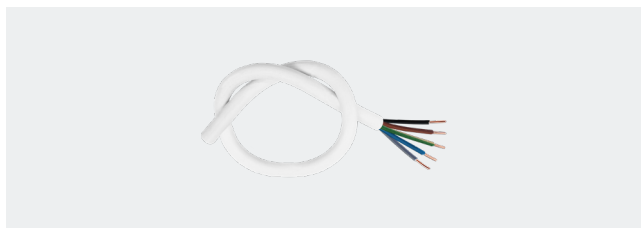

Connection cable 5x1.5mm<sup>2</sup> (x2.5m) with open end

Article 99020010



Connection cable 3x1.5mm<sup>2</sup> (x2.5m) with plug

Article 99020012