



Round Panel



blazmoo



Round Panel



Recessed

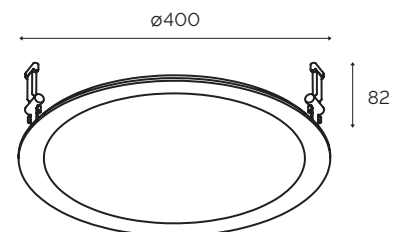

| | |
|------------------------|---|
| Voltage | 220 - 240V |
| Frequency | 50 - 60Hz |
| Power consumption | 11 W |
| Luminous flux | 1100Lm |
| Efficacy | 100Lm/w |
| Color rendering index* | > 80 |
| SDCM | < 3 |
| Color temperature* | 3000K |
| Ta | +10 ... +40 °C |
| Difuser | Microprismatic UGR <19 |
| Control | DALI |
| Mounting | Recessed |
| Body material | Aluminium |
| Wiring | Halogen free |
| Frame color | RAL 9003 |
| Size | ø 400 mm cut out ø 385 mm |
| Lifetime | 100 000 h (L80B10) at Ta = 25 °C |
| Warranty | 5 years |
| Flicker | Very low current ripple - < 1 % at ≤ 120 Hz - complying with IEEE 1789 standard |

